



SUPERIOR INTERNATIONAL INDUSTRIES
1050 COLUMBIA
800.327.8774


ADVENTURE 800

DATE:	05/29/2008	1/4" = 1'
REVISIONS:		
DATE:		
REVISIONS:		
DATE:		
REVISIONS:		
DATE:		
REVISIONS:		
DATE:		
REVISIONS:		


- PLAYGROUND SITE PREPARATION**
- 1) CONCRETE SLAB - A CLEAR SURFACE OF CONCRETE IS REQUIRED. SLAB TO BE 4" THICK WITH NO GREATER PITCH THAN 1/4" PER FOOT.
 - 2) INDOOR/OUTDOOR PLAY AREAS - A-1-7.1
 - 3) REMOVALS - EXISTING DECOR, LIGHTING, WATERFALLS
 - 4) BUILDING CONTRACTORS SHOULD CONDUCT ALL SCHEDULE CHANGES MUST BE MADE 7 DAYS PRIOR TO INSTALLATION DATE.

This drawing contains proprietary information and may not be reproduced or distributed without the written consent of Play Systems Incorporated.

SHEET PLY1 of 1

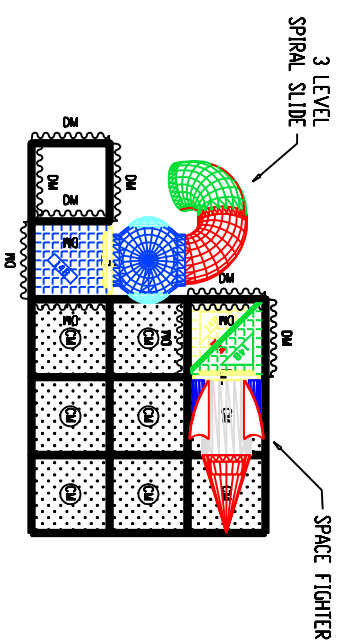


3
SCALE: 1/4" = 1'
THIRD LEVEL

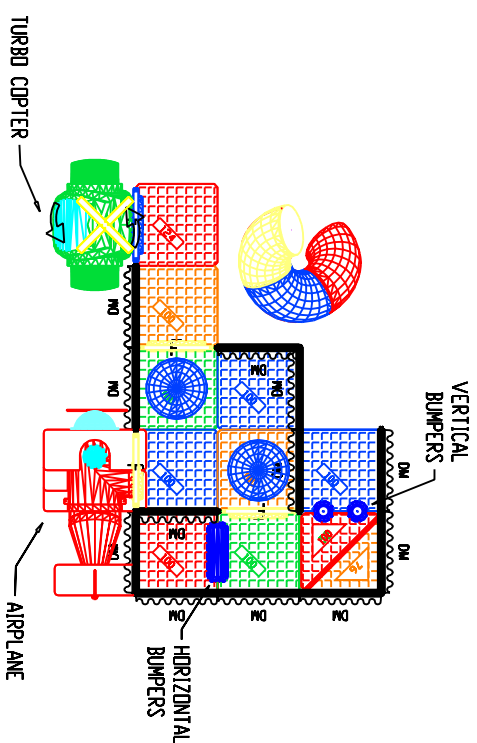


2
SCALE: 1/4" = 1'
SECOND LEVEL


PERSPECTIVE VIEWS

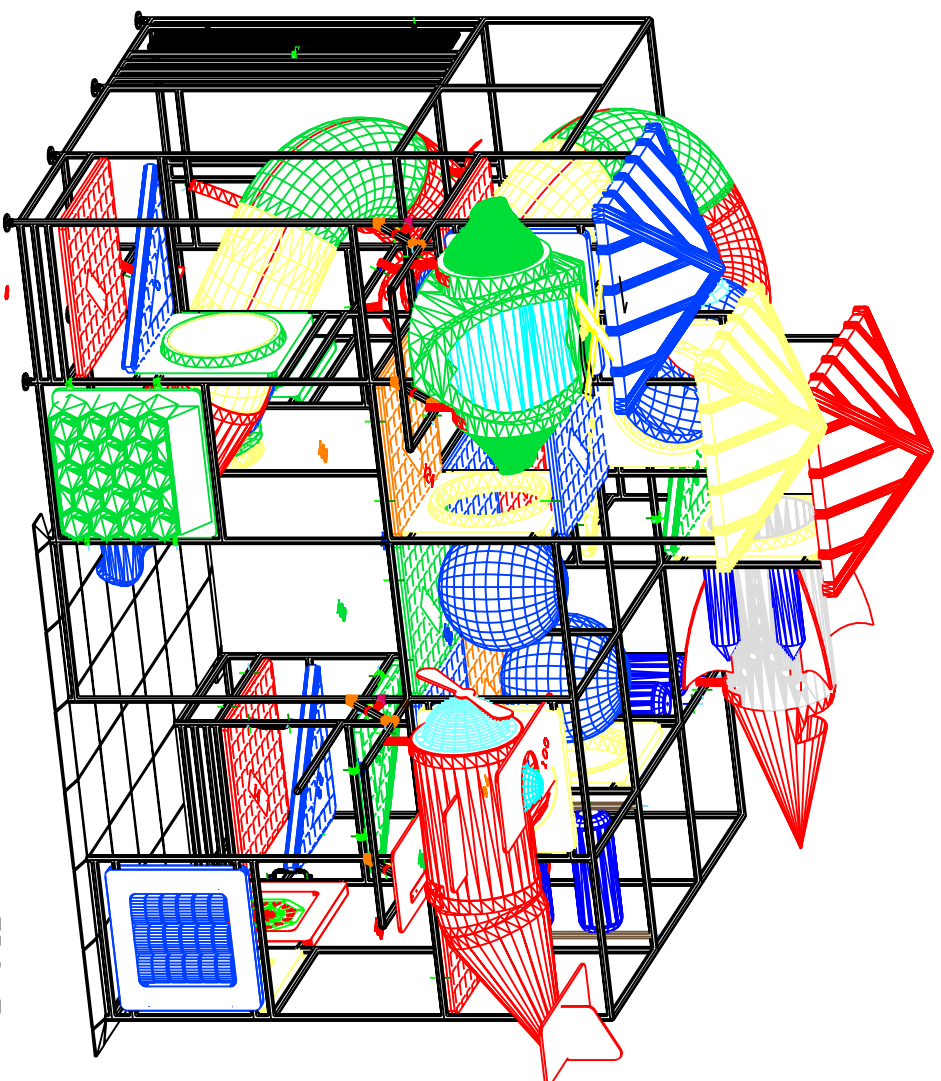

FRONT

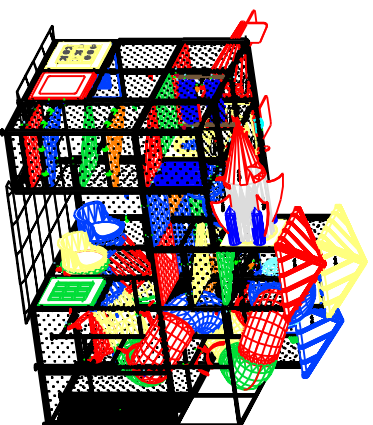

BACK

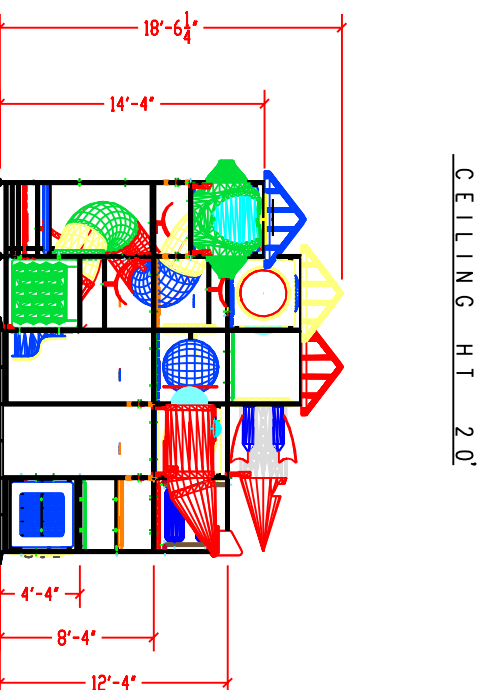


CEILING HT. 2'0"

5
SCALE: 1/8" = 1'
S LAB DETAILS

CONCRETE SHOULD BE RECESSED 2" BELOW THE TOP SURFACE OF THE TILES IN ALL SPECIFIED AREAS.
NOTES: SLAB FOR SQUARE IN PLACE SURFACE ONLY. TILES SURFACES SHOULD BE RECESSED PER SPECIFICATIONS. STRENGTH REINFORCING AREA DIRECTLY BEHIND PLAYGROUND SHOULD BE FINISHED OR TILED FOR PROTECTIVE PURPOSES.

4
SCALE: NONE
FRONT VIEW

6
SCALE: NONE

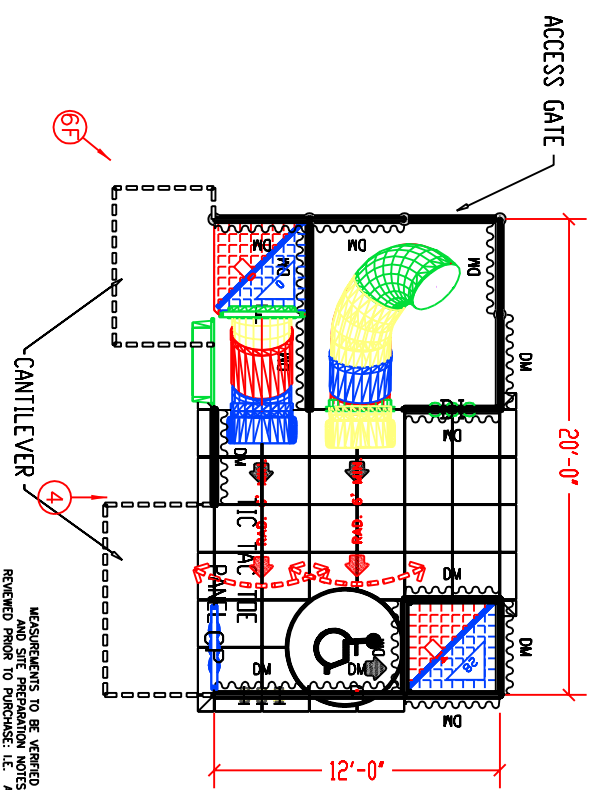

1
SCALE: 1/4" = 1'
FIRST LEVEL

MEASUREMENTS TO BE VERIFIED BY CUSTOMER AND SITE PREPARATION NOTES ARE TO BE REFERRED PRIOR TO PURCHASE. I.E. APPROVED AS DRAWN.

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

/Title
()
/Subject
(D:20090720093004-04'00')
/ModDate
()
/Keywords
(PDFCreator Version 0.9.5)
/Creator
(D:20090720093004-04'00')
/CreationDate
(Shanm)
/Author
-mark-